



Project: Albemarle & Chesapeake Canal, North Landing River Bridge
User: John N. Paine, PE, PH, CFM
Date: 24 August 2005, Wednesday
Time: 10:18 am
Input: C:\CAHHA_AND_C_CANAL.HDF
Output: C:\CAHHA_AND_C_CANAL.OUT

This data is an ANNUAL MAXIMUM series.

DATA ENTERED

Water Year	PEAK STAGE	
	h	ft
1988	2.9	
1989	3.5	
1990	3.0	
1991	2.9	
1992	2.5	
1993	3.0	
1994	2.7	
1995	2.8	
1996	3.5	
1997	2.9	
1998	3.3	
1999	3.7	
2000	2.7	
2001	2.7	
2002	2.5	
2003	2.9	
2004	3.1	
2005	2.8	

End of Data Series =====

This series contains 18 years of data.



Project: Albemarle & Chesapeake Canal, North Landing River Bridge
User: John N. Paine, PE, PH, CFM
Date: 24 August 2005, Wednesday
Time: 10:18 am
Input: C:\CAHHA_AND_C_CANAL.HDF
Output: C:\CAHHA_AND_C_CANAL.OUT

DATA AS CONTAINED IN: C:\CAHHA_AND_C_CANAL.HDF

UNSORTED				SORTED			
h (ft)	Rank	Plotting Position	Plotted Period (yrs)	h (ft)	Rank	Plotting Position	Plotted Period (yrs)
2.9	8	.4211	2.375	3.7	1	.0526	19.000
3.5	2	.1053	9.500	3.5	2	.1053	9.500
3.0	6	.3158	3.167	3.5	3	.1579	6.333
2.9	8	.4211	2.375	3.3	4	.2105	4.750
2.5	17	.8947	1.118	3.1	5	.2632	3.800
3.0	6	.3158	3.167	3.0	6	.3158	3.167
2.7	14	.7368	1.357	3.0	7	.3684	2.714
2.8	12	.6316	1.583	2.9	8	.4211	2.375
3.5	2	.1053	9.500	2.9	9	.4737	2.111
2.9	8	.4211	2.375	2.9	10	.5263	1.900
3.3	4	.2105	4.750	2.9	11	.5789	1.727
3.7	1	.0526	19.000	2.8	12	.6316	1.583
2.7	14	.7368	1.357	2.8	13	.6842	1.462
2.7	14	.7368	1.357	2.7	14	.7368	1.357
2.5	17	.8947	1.118	2.7	15	.7895	1.267
2.9	8	.4211	2.375	2.7	16	.8421	1.188
3.1	5	.2632	3.800	2.5	17	.8947	1.118
2.8	12	.6316	1.583	2.5	18	.9474	1.056

Note that the UNSORTED listing will give the same rank to identical values occurring in the input data file. The SORTED listing shows all ranks.



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am


Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

EXTREME VALUE TYPE I (GUMBEL) DISTRIBUTION

PEAK STAGE (ft)

Tr (yrs)	h ft
1.01	2.3
2	2.9
5	3.3
10	3.5
25	3.8
50	4.1
100	4.3
200	4.5
500	4.8
1000	5.0

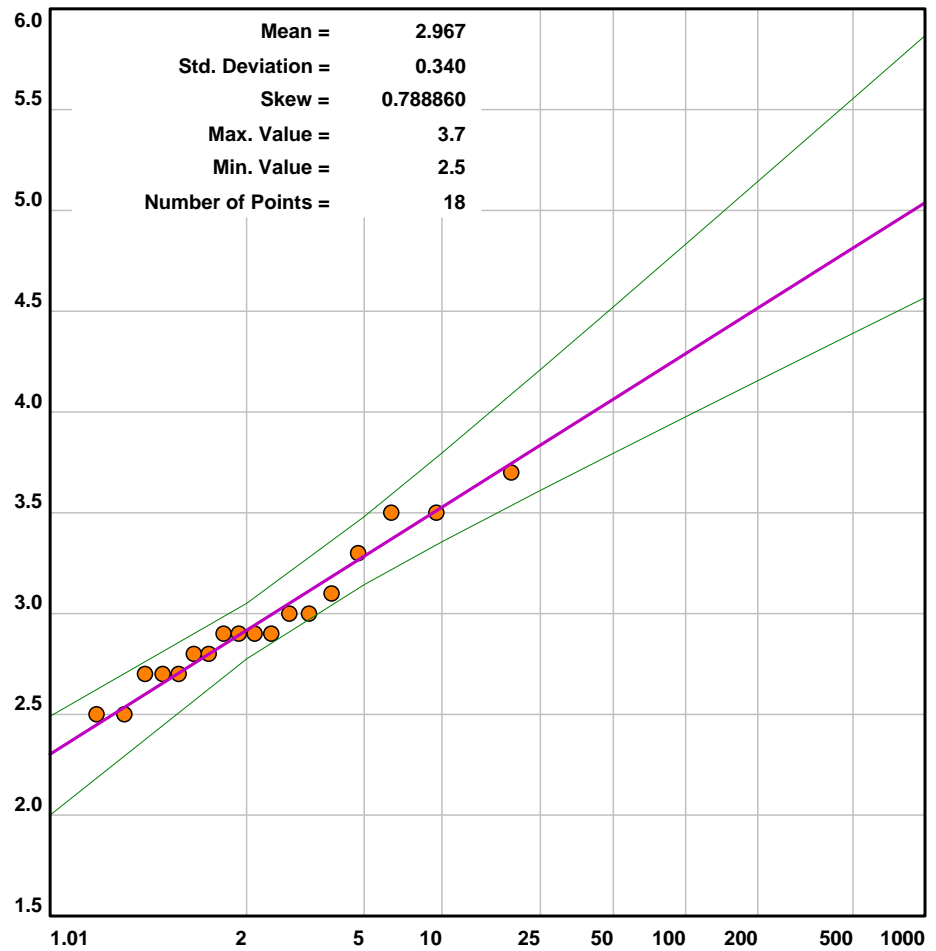

PASSED
Chi-Square Test

Albemarle & Chesapeake Canal, North Landing River Bridge

RETURN PERIOD (yrs)



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am

Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

Mean =	2.967	Maximum Input Value =	3.7
Std. Deviation =	0.340	Minimum Input Value =	2.5
Skew =	0.78885950	Number of Points =	18

EXTREME VALUE TYPE I (GUMBEL) DISTRIBUTION

RETURN PERIOD (yrs)	h (ft)	FREQUENCY FACTOR	h 90% CONFIDENCE LIMITS	
			Lower (ft)	Upper (ft)
1.01	2.3	-1.9564	2.0	2.5
2	2.9	-0.1459	2.8	3.1
5	3.3	0.9365	3.1	3.5
10	3.5	1.6532	3.4	3.8
25	3.8	2.5586	3.6	4.2
50	4.1	3.2304	3.8	4.5
100	4.3	3.8971	4.0	4.8
200	4.5	4.5615	4.2	5.1
500	4.8	5.4380	4.4	5.6
1,000	5.0	6.1004	4.6	5.9



Project: Albemarle & Chesapeake Canal, North Landing River Bridge
 User: John N. Paine, PE, PH, CFM
 Date: 24 August 2005, Wednesday
 Time: 10:18 am
 Input: C:\CAHHA_AND_C_CANAL.HDF
 Output: C:\CAHHA_AND_C_CANAL.OUT

Mean = 2.967 Maximum Input Value = 3.7
 Std. Deviation = 0.340 Minimum Input Value = 2.5
 Skew = 0.78885950 Number of Points = 18

EXTREME VALUE TYPE I (GUMBEL) DISTRIBUTION
 CHI-SQUARE TEST FOR GOODNESS-OF-FIT

CLASS	CLASS LIMITS		NUMBER OF VALUES		$\frac{(O_i - E_i)^2}{E_i}$
	Lower (ft)	Upper (ft)	Expected "E _i "	Observed "O _i "	
1	0.0	2.6	3.0000	2	0.3333
2	2.6	2.8	3.0000	3	0.0000
3	2.8	2.9	3.0000	6	3.0000
4	2.9	3.1	3.0000	2	0.3333
5	3.1	3.4	3.0000	2	0.3333
6	3.4	Infinity	3.0000	3	0.0000
COMPUTED CHI-SQUARE =					4.0000
CHI-SQUARE FROM TABLE =					6.2500

CONCLUDE: Based on Chi-Square (Goodness-of-Fit) results,
 the EXTREME VALUE TYPE I (GUMBEL) DISTRIBUTION DOES apply to the input data.
 Note that Chi-Square results are dependent upon the number of class intervals used.



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am


Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

LOG-PEARSON TYPE III DISTRIBUTION

PEAK STAGE (ft)

Tr (yrs)	h ft
1.01	2.3
2	2.9
5	3.2
10	3.4
25	3.6
50	3.8
100	3.9
200	4.0
500	4.2
1000	4.3

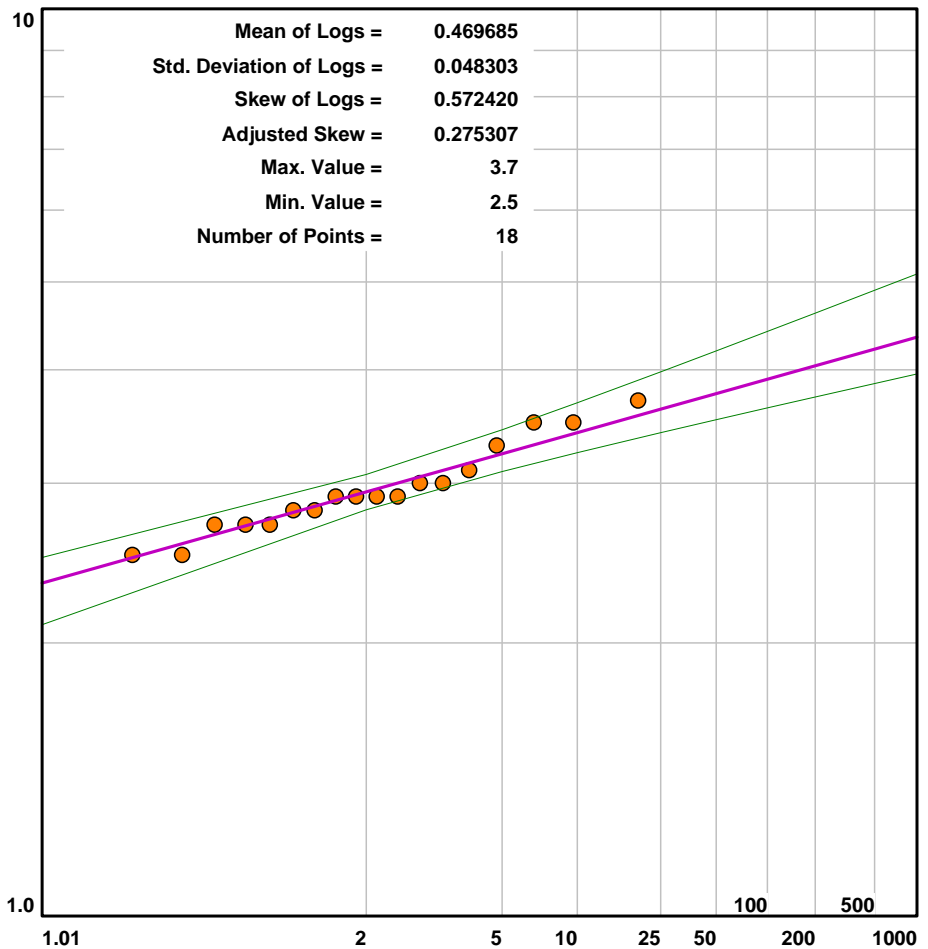

FAILED
Chi-Square Test

Albemarle & Chesapeake Canal, North Landing River Bridge

RETURN PERIOD (yrs)



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am

Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

Mean of Logs =	0.469685	Maximum Input Value =	3.7
Std. Deviation of Logs =	0.048303	Minimum Input Value =	2.5
Skew of Logs =	0.572420	Number of Points =	18
Adjusted Skew =	0.275307	Generalized Map Skew =	0.0

LOG-PEARSON TYPE III DISTRIBUTION

RETURN PERIOD (yrs)	h (ft)	FREQUENCY FACTOR	h 90% CONFIDENCE LIMITS	
			Lower (ft)	Upper (ft)
1.01	2.3	-2.1262	2.1	2.5
2	2.9	-0.0458	2.8	3.1
5	3.2	0.8254	3.1	3.4
10	3.4	1.3073	3.2	3.7
25	3.6	1.8416	3.4	4.0
50	3.8	2.1981	3.5	4.2
100	3.9	2.5264	3.6	4.4
200	4.0	2.8333	3.7	4.6
500	4.2	3.2136	3.9	4.9
1,000	4.3	3.4857	4.0	5.1



Project: Albemarle & Chesapeake Canal, North Landing River Bridge
 User: John N. Paine, PE, PH, CFM
 Date: 24 August 2005, Wednesday
 Time: 10:18 am
 Input: C:\CAHHA_AND_C_CANAL.HDF
 Output: C:\CAHHA_AND_C_CANAL.OUT

Mean of Logs =	0.469685	Maximum Input Value =	3.7
Std. Deviation of Logs =	0.048303	Minimum Input Value =	2.5
Skew of Logs =	0.572420	Number of Points =	18
Adjusted Skew =	0.275307	Generalized Map Skew =	0.0

LOG-PEARSON TYPE III DISTRIBUTION
 CHI-SQUARE TEST FOR GOODNESS-OF-FIT

CLASS	CLASS LIMITS		NUMBER OF VALUES		$\frac{(O_i - E_i)^2}{E_i}$
	Lower (ft)	Upper (ft)	Expected "E _i "	Observed "O _i "	
1	0.0	2.6	3.0000	2	0.3333
2	2.6	2.8	3.0000	3	0.0000
3	2.8	2.9	3.0000	6	3.0000
4	2.9	3.1	3.0000	2	0.3333
5	3.1	3.3	3.0000	1	1.3333
6	3.3	Infinity	3.0000	4	0.3333
COMPUTED CHI-SQUARE =					5.3333
CHI-SQUARE FROM TABLE =					4.6100

CONCLUDE: Based on Chi-Square (Goodness-of-Fit) results,
 the LOG-PEARSON TYPE III DISTRIBUTION does NOT apply to the input data.
 Note that Chi-Square results are dependent upon the number of class intervals used.



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am


Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

LOG-NORMAL DISTRIBUTION

PEAK STAGE (ft)

Tr (yrs)	h ft
1.01	2.3
2	2.9
5	3.2
10	3.4
25	3.6
50	3.7
100	3.8
200	3.9
500	4.1
1000	4.2

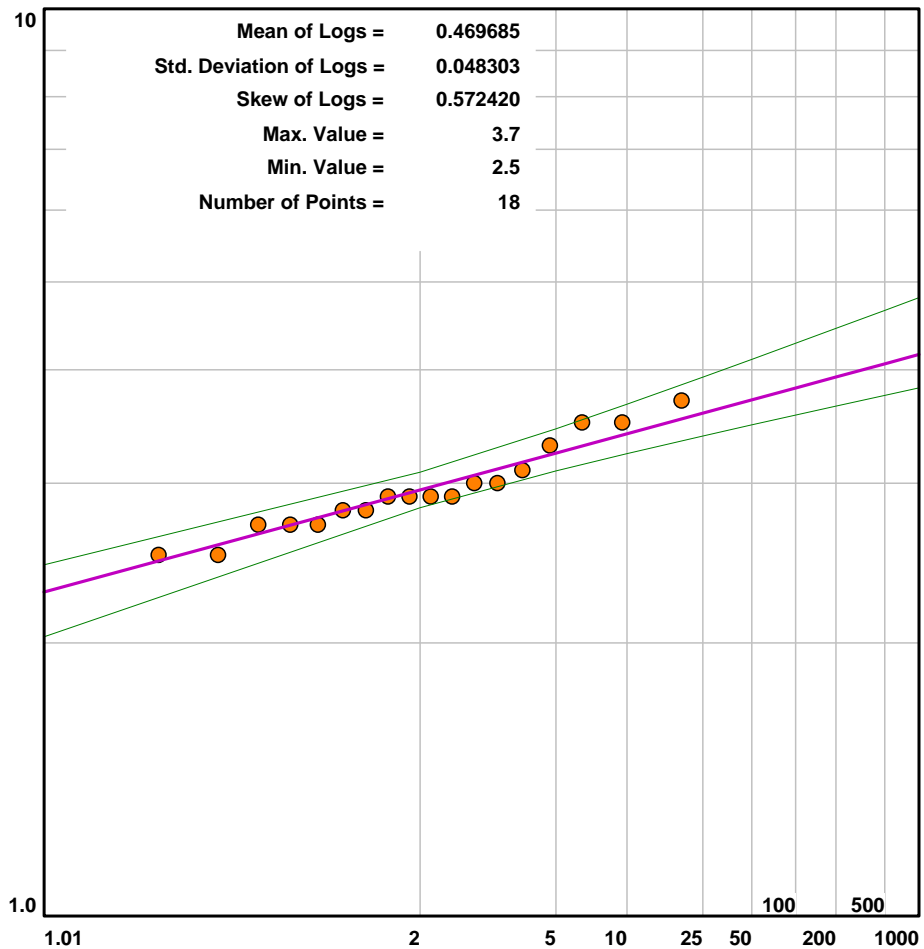

PASSED
Chi-Square Test

Albemarle & Chesapeake Canal, North Landing River Bridge

RETURN PERIOD (yrs)



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am

Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

Mean of Logs =	0.469685	Maximum Input Value =	3.7
Std. Deviation of Logs =	0.048303	Minimum Input Value =	2.5
Skew of Logs =	0.572420	Number of Points =	18

LOG-NORMAL DISTRIBUTION

RETURN PERIOD (yrs)	h (ft)	FREQUENCY FACTOR	h 90% CONFIDENCE LIMITS	
			Lower (ft)	Upper (ft)
1.01	2.3	-2.3305	2.0	2.4
2	2.9	0.0000	2.8	3.1
5	3.2	0.8415	3.1	3.4
10	3.4	1.2817	3.2	3.7
25	3.6	1.7511	3.4	3.9
50	3.7	2.0542	3.5	4.1
100	3.8	2.3268	3.6	4.3
200	3.9	2.5762	3.6	4.4
500	4.1	2.8785	3.7	4.7
1,000	4.2	3.0905	3.8	4.8



Project: Albemarle & Chesapeake Canal, North Landing River Bridge
 User: John N. Paine, PE, PH, CFM
 Date: 24 August 2005, Wednesday
 Time: 10:18 am
 Input: C:\CAHHA_AND_C_CANAL.HDF
 Output: C:\CAHHA_AND_C_CANAL.OUT

Mean of Logs =	0.469685	Maximum Input Value =	3.7
Std. Deviation of Logs =	0.048303	Minimum Input Value =	2.5
Skew of Logs =	0.572420	Number of Points =	18

LOG-NORMAL DISTRIBUTION
 CHI-SQUARE TEST FOR GOODNESS-OF-FIT

CLASS	CLASS LIMITS		NUMBER OF VALUES		$\frac{(O_i - E_i)^2}{E_i}$
	Lower (ft)	Upper (ft)	Expected "E _i "	Observed "O _i "	
1	0.0	2.6	3.0000	2	0.3333
2	2.6	2.8	3.0000	5	1.3333
3	2.8	2.9	3.0000	4	0.3333
4	2.9	3.1	3.0000	2	0.3333
5	3.1	3.3	3.0000	1	1.3333
6	3.3	Infinity	3.0000	4	0.3333
COMPUTED CHI-SQUARE =					4.0000
CHI-SQUARE FROM TABLE =					6.2500

CONCLUDE: Based on Chi-Square (Goodness-of-Fit) results,
 the LOG-NORMAL DISTRIBUTION DOES apply to the input data.
 Note that Chi-Square results are dependent upon the number of class intervals used.



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am


Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

NORMAL DISTRIBUTION

PEAK STAGE (ft)

Tr (yrs)	h ft
1.01	2.2
2	3.0
5	3.3
10	3.4
25	3.6
50	3.7
100	3.8
200	3.8
500	3.9
1000	4.0

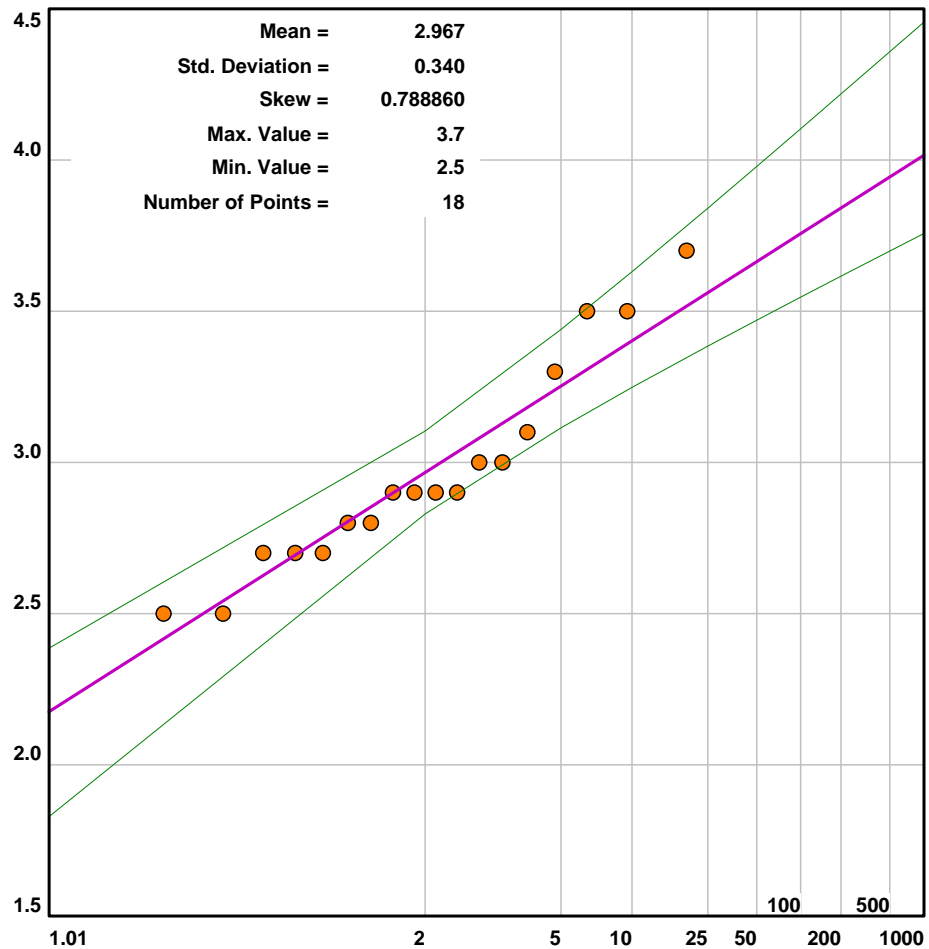

PASSED
Chi-Square Test

Albemarle & Chesapeake Canal, North Landing River Bridge

RETURN PERIOD (yrs)



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am

Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

Mean =	2.967	Maximum Input Value =	3.7
Std. Deviation =	0.340	Minimum Input Value =	2.5
Skew =	0.78885950	Number of Points =	18

NORMAL DISTRIBUTION

RETURN PERIOD (yrs)	h (ft)	FREQUENCY FACTOR	h 90% CONFIDENCE LIMITS	
			Lower (ft)	Upper (ft)
1.01	2.2	-2.3305	1.8	2.4
2	3.0	0.0000	2.8	3.1
5	3.3	0.8415	3.1	3.4
10	3.4	1.2817	3.2	3.6
25	3.6	1.7511	3.4	3.8
50	3.7	2.0542	3.5	4.0
100	3.8	2.3268	3.5	4.1
200	3.8	2.5762	3.6	4.2
500	3.9	2.8785	3.7	4.4
1,000	4.0	3.0905	3.8	4.5



Project: Albemarle & Chesapeake Canal, North Landing River Bridge
 User: John N. Paine, PE, PH, CFM
 Date: 24 August 2005, Wednesday
 Time: 10:18 am
 Input: C:\CAHHA_AND_C_CANAL.HDF
 Output: C:\CAHHA_AND_C_CANAL.OUT

Mean = 2.967 Maximum Input Value = 3.7
 Std. Deviation = 0.340 Minimum Input Value = 2.5
 Skew = 0.78885950 Number of Points = 18

NORMAL DISTRIBUTION
 CHI-SQUARE TEST FOR GOODNESS-OF-FIT

CLASS	CLASS LIMITS		NUMBER OF VALUES		$\frac{(O_i - E_i)^2}{E_i}$
	Lower (ft)	Upper (ft)	Expected "E _i "	Observed "O _i "	
1	0.0	2.6	3.0000	2	0.3333
2	2.6	2.8	3.0000	5	1.3333
3	2.8	3.0	3.0000	4	0.3333
4	3.0	3.1	3.0000	3	0.0000
5	3.1	3.3	3.0000	0	3.0000
6	3.3	Infinity	3.0000	4	0.3333
COMPUTED CHI-SQUARE =					5.3333
CHI-SQUARE FROM TABLE =					6.2500

CONCLUDE: Based on Chi-Square (Goodness-of-Fit) results,
 the NORMAL DISTRIBUTION DOES apply to the input data.
 Note that Chi-Square results are dependent upon the number of class intervals used.



Project: Albemarle & Chesapeake Canal, North Landing River Bridge

User: John N. Paine, PE, PH, CFM

Date: 24 August 2005, Wednesday

Time: 10:18 am

Input: C:\CAHHA_AND_C_CANAL.HDF

Output: C:\CAHHA_AND_C_CANAL.OUT

Mean =	2.967	Maximum Input Value =	3.7
Std. Deviation =	0.340	Minimum Input Value =	2.5
Skew =	0.78885950	Number of Points =	18
Mean of Logs =	0.469685	Generalized Map Skew =	0.0
Std. Deviation of Logs =	0.048303		
Skew of Logs =	0.572420		
Adjusted Skew =	0.275307		

COMPARISON OF STATISTICAL DISTRIBUTIONS

Number of Chi-Square class intervals used = 6

DISTRIBUTION	CHI-SQUARE	
	COMPUTED	TABULATED
EXTREME VALUE TYPE I (GUMBEL)	4.000	6.250 Passed
LOG-PEARSON TYPE III	5.333	4.610 FAILED
LOG-NORMAL	4.000	6.250 Passed
NORMAL	5.333	6.250 Passed

BASED ON A 10-PERCENT SIGNIFICANCE LEVEL, THE
EXTREME VALUE TYPE I (GUMBEL)
DISTRIBUTION RESULTS IN THE BEST FIT OF THE DATA.