


CONSTRUCTION NOTES:
 CURB TO BE SAW CUT VERTICALLY AT EACH END.
 FACE OF BREAK AND CURB CUT TO BE COATED WITH BONDING COMPOUND IN ACCORDANCE WITH VDOT SPECIFICATIONS, SECTION 24.3.
 THIS METHOD OF CONSTRUCTION WILL BE ALLOWED AS AN ALTERNATE IN AREAS WHERE CURB AND GUTTER WAS PREVIOUSLY INSTALLED, EXCEPT IN CASE OF FAULTY WORKMANSHIP. IN THIS INSTANCE, COMPLETE REMOVAL OF THE CURB AND GUTTER WILL BE REQUIRED.



PRIVATE ENTRANCE WIDTH - 10' MINIMUM
 20' MAXIMUM

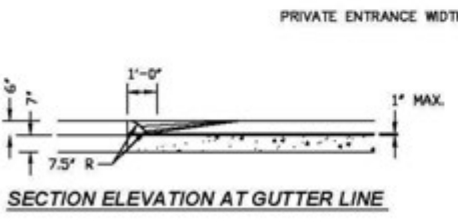


DESIGN AND CONSTRUCTION STANDARDS

RESIDENTIAL ENTRANCE FOR STREET WITH CURB & GUTTER

| | | | | |
|----------|-----------------------------------|---------------|----------------|-------------|
| 01/15/10 | REVIEWED PFM 2010 EDITION FOR WEB | CHKD BY: ALH | DATE: 01/20/10 | CG-7 |
| DATE | REVISIONS | APPROVED: JDC | DATE: 01/20/10 | |



APPROVED FOR THE WEB _____
 City Engineer _____
 Date _____

Copyright Digital Version City of Chesapeake 2010

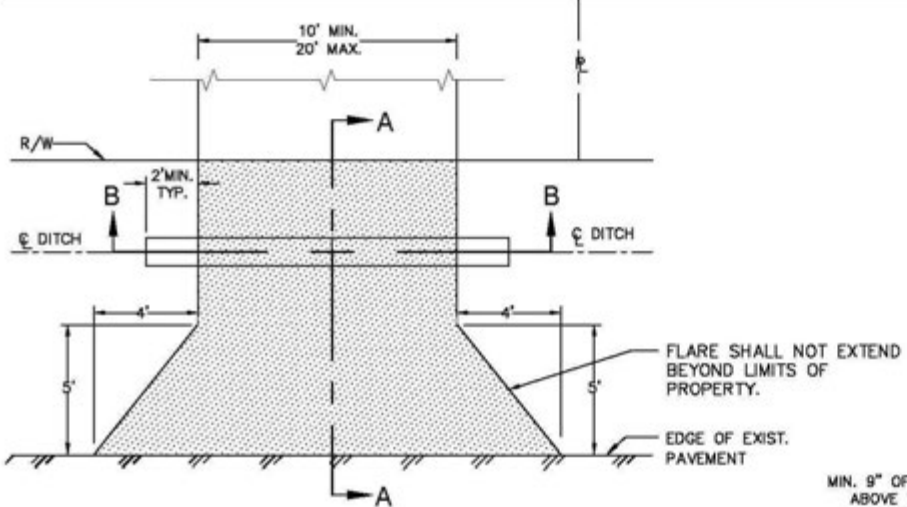

- NOTES:**
1. PIPE SIZE TO BE DETERMINED BY THE DEPT. OF DEVELOPMENT & PERMITS
 2. MINIMUM 24 L.F. R.C.P. CLASS III REQUIRED
 3. DITCH TO BE CLEANED AND REGRADED
 4. ALL JOINTS TO BE WRAPPED WITH NON-WOVEN FILTER FABRIC.
 5. ALL STONE TO BE #21A OR 21B

| ROUND PIPE | ELLIPTICAL PIPE |
|------------|-----------------|
| 18" | 14" X 23" |
| 24" | 19" X 30" |
| 27" | 22" X 34" |
| 30" | 24" X 38" |
| 36" | 29" X 45" |

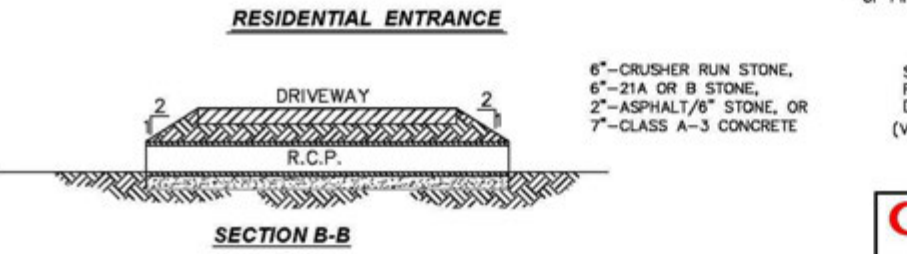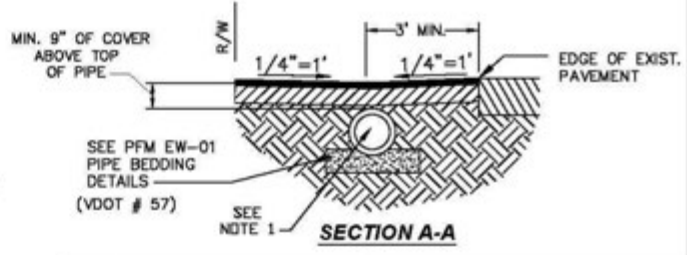

DESIGN AND CONSTRUCTION STANDARDS

RESIDENTIAL ENTRANCE FOR STREETS WITHOUT CURB & GUTTER

| | | | | |
|----------|-----------------------------------|---------------|----------------|--------------|
| 01/15/10 | REVIEWED PFM 2010 EDITION FOR WEB | CHKD BY: ALH | DATE: 01/20/10 | CG-7A |
| DATE | REVISIONS | APPROVED: JDC | DATE: 01/20/10 | |

APPROVED FOR THE WEB _____
 City Engineer _____
 Date _____

Copyright Digital Version City of Chesapeake 2010